



## GST200-2 Intelligent Fire Alarm Control Panel



### Description



GST200-2 Intelligent Fire Alarm Control Panel (FACP) is designed to comply with EN54-2 and EN54-4 standard (LPCB certificate No.: 548p) with qualities of simple installation, operation, and easy maintenance. 2 loop addressable panel is suitable for small buildings like office, restaurant, store, shop, etc.

### Features and Benefits


- Max. 30 zones. Each zone has its own alarm and fault/disable indicator and a label
- Capacity 236 addressable devices
- Option expanded to 2 loops, 477 loop devices
- Compatible with GST intelligent and digital products
- 8X18 characters LCD screen
- 15 LEDs to display important information
- Non-Volatile memory ensures the data does not loss even if power supply is accidentally removed
- Sounder strobe output provides 0.5A/24V load, compatible with GST conventional sounders
- RS232 interface enables communication with PC
- RS485 or CAN interface enables networking

### Installation Data

GST200-2 FACP is wall-mount/flush-mount combined. Its appearance and the mounting holes are shown here.

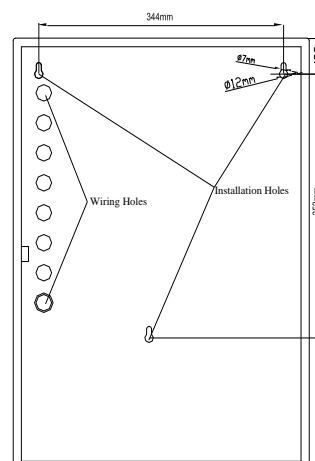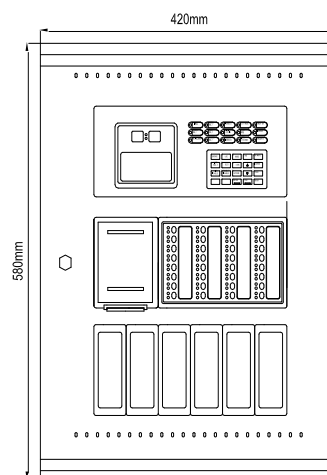

## Terminals

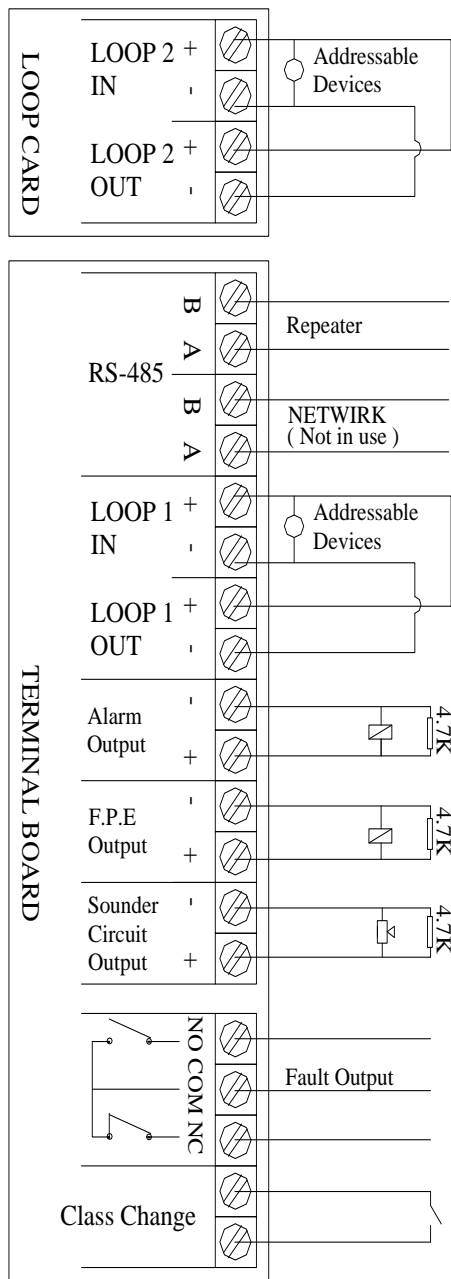

### Loop(s):

Maximum 2 loops (with additional loop card) for standalone panel. Class A type connection should be applied, from Loop Out to Loop IN. Beware of the polarization.

### Network:

A network card will be used for connecting into GST network. Beware of the polarization.

### Active outputs:

3 active outputs are provided for general alarm (500mA), sounder circuit (500mA) and fire protection equipment (500mA), at 24VDC with cable monitoring. A 4k7 EOLR is required. Each can be set NO, NC or Active.

### Repeater output:

Linked with the main board, individual line from network

### Fault output:

A general fault output is provided with both NO and NC contact. The relay will be engaged when panel is in normal status, and discharged whenever any fault occurs or powered off.

### Class Change:

Remote control of Sounder Circuit output

## Cable Requirement

\* All cables should be fire rated and follow local codes.

Loop: Minimum 1.0mm<sup>2</sup>, ideally 1.5mm<sup>2</sup>, 1500 meters

Network: Minimum 1.0mm<sup>2</sup>, ideally 1.5mm<sup>2</sup>, 1200 meters

Active Outputs: Minimum 1.5mm<sup>2</sup>, ideally 2.5mm<sup>2</sup>

## Certificates and Compliance

- Standards: CE / CPD / EN54-2 / EN54-4
- Certifications: LPCB
- BS5839-1 Compliant
- WEEE & RoHS Compliant

## Technical Specification

|                         |  |
|-------------------------|--|
| Primary Supply          | 220/230VAC +10%/-15%, 50/60Hz  |
| AC Current              | 0.5A   |
| Standby Power           | 21AH/24VDC   |
| Max. Battery Resistance | 1 Ω  |
| Loop Capacity           | 2 Loops (with additional loop card)  |
| Zone Capacity           | 30   |
| Device Capacity         | 235 for 1 <sup>st</sup> loop<br>242 for 2 <sup>nd</sup> loop                                   |
| Printer                 | Optional Thermal<br>ASCII code printer   |
| Display                 | 8(lines) x 18 (characters), LCD  |
| Network(RS485)          | Class A, Max. 32 panels (by card)  |
| Network(CAN)            | Class A, Max. 100 panels (by card)<br>Class B, Max. 240 panels (by card and other accessories) |
| PC Port                 | RS232/USB interface (by card)  |
| Protection              | IP30   |
| Operating Environment   | 0 °C ~ +40 °C<br>≤95%, non condensing  |
| Dimensions              | 420mm(W)x580mm(H)x202mm(D)   |

## Order Information

|             |                                      |
|-------------|--------------------------------------|
| Part No.    | GST200-2/1                           |
| Device Name | Intelligent Fire Alarm Control Panel |
| Order Code  | 1003109                              |

## Variant Models

| Part No.     | Order Code | Property                 |
|--------------|------------|--------------------------|
| GST200-2/2   | 1002185    | 2 loops                  |
| GST200-2/1HU | 1004674    | Hungarian Model, 1-loop  |
| GST200-2/1PT | 1004672    | Portuguese Model, 1-loop |
| GST200-2/1SP | 1003273    | Spanish Model, 1-loop    |

## Compatible Devices

Networks:

GST-IFP8 Intelligent Fire Alarm Control Panel  
GST200/2/N Series Intelligent Fire Alarm Panel  
GSTGMC Graphic Monitor Software  
GST-NRP01 Network Repeater Panel  
GST852RP LCD Passive Repeater Panel  
GST8903 Mimic Panel

Loop Devices:

DI-910xE Series Digital Intelligent Detector  
I-910x Series Intelligent Analogue Detector  
DI-9204E Addressable Manual Call Point  
I-930x Series Addressable interfaces  
I-940x Series Addressable Sounders and Strobes  
C-950x Series Line Isolator  
I-960x Series Intelligent Combustible Gas Detectors

## Accessories



Part No.: LC200  
Device name: Loop Card  
Order Code: 3631370



Part No.: P-9930  
Device name: RS232 Communication Card  
Order Code: 3671836



Part No.: P-9930ModBus  
Device name: ModBus Communication Card  
Order Code: 3671830



Part No.: P-9930TCP/IP  
Device name: TCP/IP interface card  
Order Code: 3672319



Part No.: P-9940A  
Device name: RS485 Class A Network Card  
Order Code: 3660994



Part No.: P-9960  
Device name: CAN Class B Network Card  
Order Code: 3661849



Part No.: P-9960A  
Device name: CAN Class A Network Card  
Order Code: 3662002